

**MORE POWER - LESS SPACE®**



**HIGH RATE SERIES**

**45HR2000**

- Exclusive IPF® technology optimizes power capacity, cell consistency, and long-term reliability
- Advanced AGM technology for superior high-rate power
- Puncture resistant micro-porous glass mat separators extend life
- Reinforced case resists bulging and meets safety requirements (UL 94 V-0)
- Case & cover heat sealed and 100% tested to prevent leaks
- Epoxy-sealed posts eliminate leaks
- Flame arresting, low pressure, self-sealing valves are 100% factory tested
- Computer-aided design and manufacturing control processes and standards to ensure quality products
- All batteries meet or exceed IEEE recommended practices
- Battery design and construction meet UL recognition requirements
- Plate thickness optimized for long life
- Guaranteed 100% initial string capacity when tested in accordance with IEEE 1188



**SPECIFICATIONS**


**Nominal Voltage:** 12-Volts  
**Rating:** 168 Watts/Cell @ 15 min. rate to 1.67 V.P.C.  
**Positive Plate:** >98% Pure lead with tin-calcium alloy  
**Negative Plate:** Pure lead, calcium alloy  
**Post Seal:** Epoxy-sealed  
**Terminal:** Top access, 1/4" – 20 threaded insert  
**Case/Cover:** Flame-retardant, polypropylene – UL 94 V-0/>28% L.O.I.

**Safety Vent:** Low positive pressure, self-sealing w/ flame arrestor  
**Float Voltage:** 2.25 V.P.C. ± 0.01 V.P.C. @ 77°F (25°C)  
**Design life:** 10 years in float applications @ 77°F (25°C)  
**Dimensions:** Length - 8.99" (228.4 mm)  
 Width - 5.47" (138.9 mm)  
 Height - 8.27" (210.1 mm)  
**Weight:** 40 lbs. (18 kg)

**DISCHARGE RATINGS IN WATTS PER CELL @ 77°F (25°C)†**

Volts per Cell (V.P.C.)	1 MIN.	5 MIN.	10 MIN.	15 MIN.	20 MIN.	30 MIN.	40 MIN.	50 MIN.	60 MIN.
1.60	569	322	222	172	141	105	84.5	71.5	62.3
1.63	548	316	219	170	140	104	84.1	71.1	62.0
1.65	537	312	217	169	139	104	83.9	70.9	61.8
1.67	526	308	216	168	138	104	83.6	70.7	61.6
1.70	500	300	212	166	137	103	83.0	70.1	61.0
1.75	472	286	205	161	134	101	81.7	69.0	60.2

†Subject to change without notice.

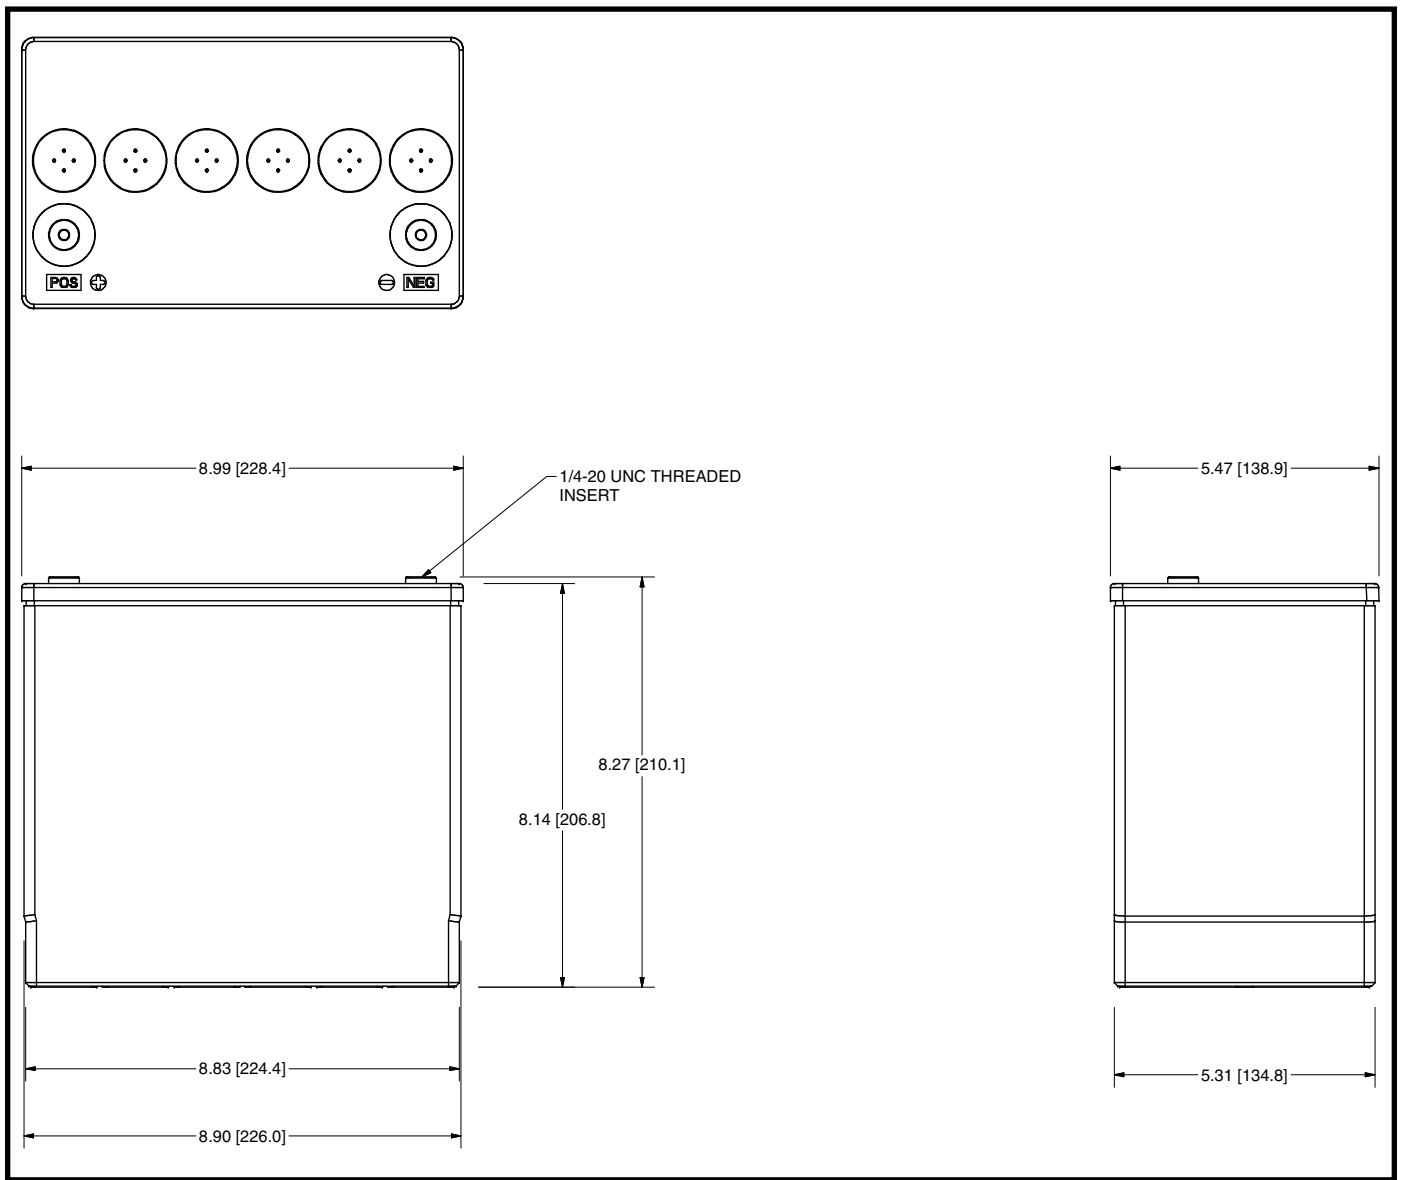

### OPTIONAL FACTORY ACCEPTANCE TESTING


- More economical than performing a load test on site
- Confirms published capacity rating of product
- Establishes a factory baseline ohmic reading
- Formal test report provided
- Contact your East Penn Mfg. representative for additional information

### TESTING SPECIFICATIONS

- Exceeds IEEE-1188 standards
- 10 minute battery rate to 1.67 V.P.C.
- Constant power discharge
- String  $\geq$  100% capacity — All individual batteries  $\geq$  95% capacity
- Conductance readings taken before the test
- Battery voltage recorded on report every 2 minutes

### INSTALLATION AND OPERATING INSTRUCTIONS

- <http://www.eastpennmanufacturing.com/wp-content/uploads/High-Rate-IO-Manual-0970.pdf>



[www.dekabatteries.com](http://www.dekabatteries.com)



East Penn Manufacturing Co. Lyon Station, PA 19536-0147 Phone: 610-682-3263 Fax: 610-682-0891 e-mail: [reservepowersales@dekabatteries.com](mailto:reservepowersales@dekabatteries.com)