

MORE POWER - LESS SPACE®



HIGH RATE SERIES

U1HR1500

- Exclusive IPF® technology optimizes power capacity, cell consistency, and long-term reliability
- Advanced AGM technology for superior high-rate power
- Puncture resistant micro-porous glass mat separators extend life
- Reinforced case resists bulging and meets safety requirements (UL 94 V-0)
- Case & cover heat sealed and 100% tested to prevent leaks
- Epoxy-sealed posts eliminate leaks
- Flame arresting, low pressure, self-sealing valves are 100% factory tested
- Computer-aided design and manufacturing control processes and standards to ensure quality products
- All batteries meet or exceed IEEE recommended practices
- Battery design and construction meet UL recognition requirements
- Plate thickness optimized for long life
- Guaranteed 100% initial string capacity when tested in accordance with IEEE 1188



SPECIFICATIONS


Nominal Voltage: 12-Volts
Rating: 119 Watts/Cell @ 15 min. rate to 1.67 V.P.C.
Positive Plate: >98% Pure lead with tin-calcium alloy
Negative Plate: Pure lead, calcium alloy
Post Seal: Epoxy-sealed
Terminal: Top access, 1/4" – 20 threaded insert
Case/Cover: Flame-retardant, polypropylene – UL 94 V-0/>28% L.O.I.

Safety Vent: Low positive pressure, self-sealing w/ flame arrestor
Float Voltage: 2.25 V.P.C. ± 0.01 V.P.C. @ 77°F (25°C)
Design life: 5 years in float applications @ 77°F (25°C)
Dimensions: Length - 7.72" (196.2 mm)
 Width - 5.21" (132.3 mm)
 Height - 6.68" (169.7 mm)
Weight: 26 lbs. (12 kg)

DISCHARGE RATINGS IN WATTS PER CELL @ 77°F (25°C)†

Volts per Cell (V.P.C.)	1 MIN.	5 MIN.	10 MIN.	15 MIN.	20 MIN.	30 MIN.	40 MIN.	50 MIN.	60 MIN.
1.60	502	256	162	121	97.5	71.3	56.6	47.4	41.0
1.63	485	254	161	120	97.0	70.9	56.4	47.2	40.8
1.65	465	250	160	120	96.8	70.6	56.2	47.1	40.7
1.67	445	247	159	119	96.5	70.2	56.1	47.0	40.6
1.70	418	237	156	117	94.7	69.3	55.3	46.5	40.3
1.75	377	223	149	113	92.2	68.0	54.4	45.8	39.9

†Subject to change without notice.

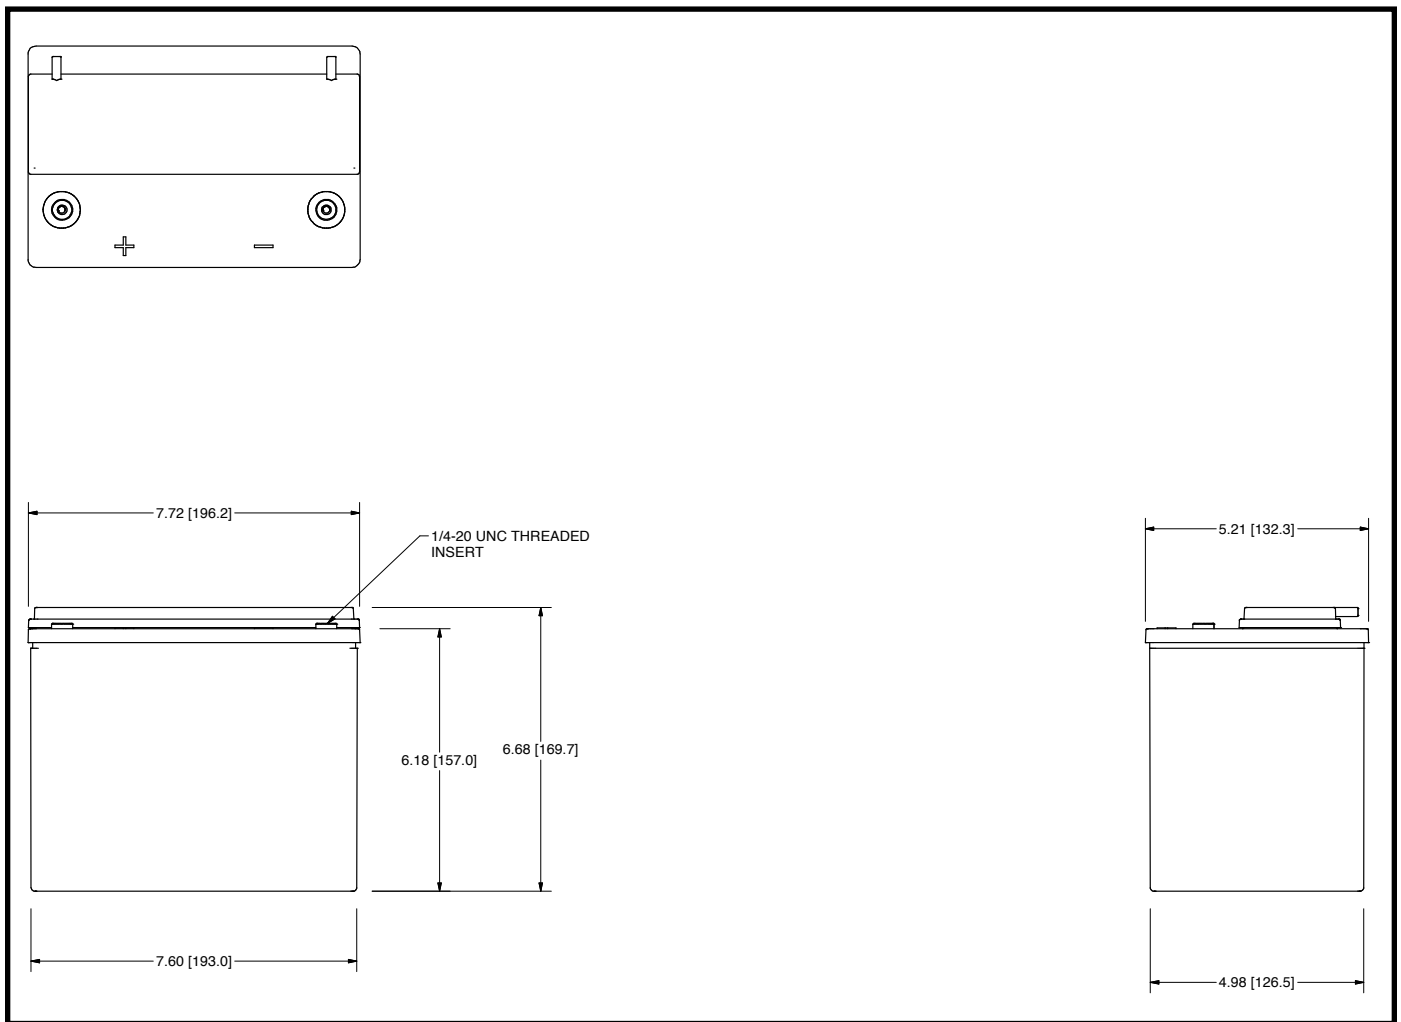

OPTIONAL FACTORY ACCEPTANCE TESTING


- More economical than performing a load test on site
- Confirms published capacity rating of product
- Establishes a factory baseline ohmic reading
- Formal test report provided
- Contact your East Penn Mfg. representative for additional information

TESTING SPECIFICATIONS

- Exceeds IEEE-1188 standards
- 10 minute battery rate to 1.67 V.P.C.
- Constant power discharge
- String \geq 100% capacity — All individual batteries \geq 95% capacity
- Conductance readings taken before the test
- Battery voltage recorded on report every 2 minutes

INSTALLATION AND OPERATING INSTRUCTIONS

- <http://www.eastpennmanufacturing.com/wp-content/uploads/High-Rate-IO-Manual-0970.pdf>



www.dekabatteries.com



East Penn Manufacturing Co. Lyon Station, PA 19536-0147 Phone: 610-682-3263 Fax: 610-682-0891 e-mail: reservepowersales@dekabatteries.com